
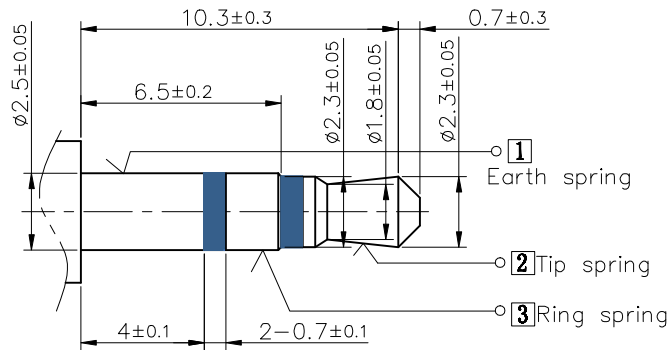
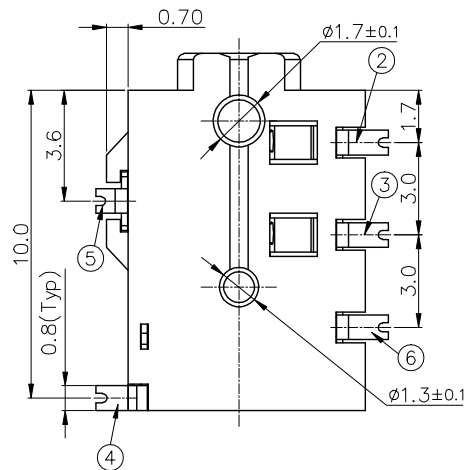
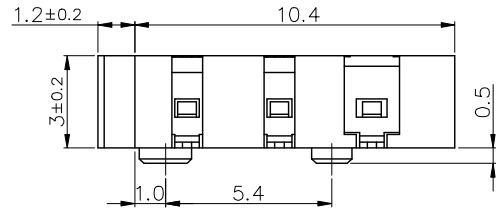


ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	20120325	drawing release	kevin

- Specification:**
1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 30m\Omega$;
After test: $\leq 50m\Omega$
 3. Insulation resistance: $\geq 100M\Omega$ (500VDC);
After test: $\geq 50M\Omega$
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3N~25N;
 6. life test: 5000cycles min;
 7. Operation temperature range: $-20^{\circ}C \sim 70^{\circ}C$;
 8. Preservation temperature range: $-40^{\circ}C \sim 85^{\circ}C$;

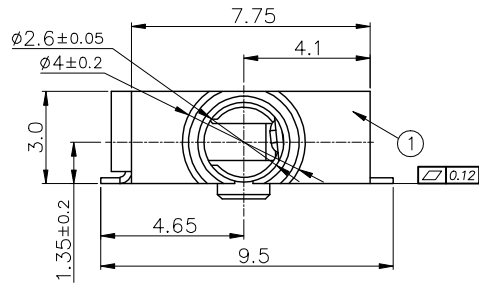


RECOMMENDED PLUG
Ø2.5 3-POLE STANDARD PLUG

P/N	PJ06-8142532A	PJ06-8142532B	PJ06-8142532C
Schematic code			

□: Terminal NO.

⑥	Shunt terminal-2	⑤	1	Copper Alloy t=0.20	Gold/Silver Plating
⑤	Shunt terminal-1	④	1	Copper Alloy t=0.20	Gold/Silver Plating
④	Tip spring	②	1	Copper Alloy t=0.20	Gold/Silver Plating
③	Ring spring	③	1	Copper Alloy t=0.20	Gold/Silver Plating
②	Earth spring	①	1	Copper Alloy t=0.20	Gold/Silver Plating
①	Housing		1	Hi-Tem. Thermoplastic	Black
NO.	DESCRIPTION	Q' TY		MATERIAL	REMARK

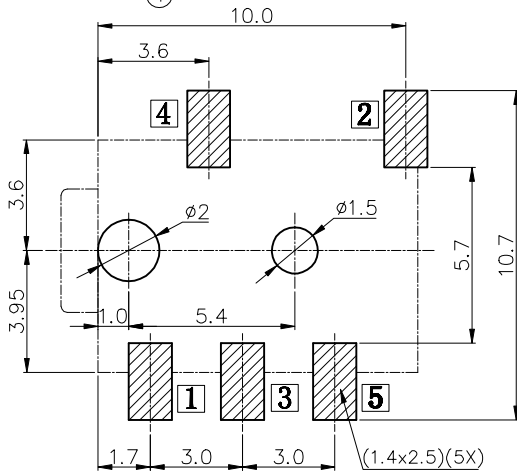

PCB HOLES(TOP VIEW) t=1.0mm
NOTE: GENERAL TOLERANCE: $\pm 0.05mm$

LINEAR	ANGLE	NAME(INTENDED USE) PHONE JACK
.X ± 0.50	X ± 5	PART NO.(INTENDED USE) PJ06-8142532
.XX ± 0.30	.X ± 3	APPD:
.XXX ± 0.15	.XXX ± 2	CHKD:
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		DR: 3/9-16

东莞市全晟通精密制造有限公司
DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO. LTD

TITLE: CUSTOMER DRAWING
PJ06-8142532

DWG NO.:

	UNITS	SCALE	SHEET	REV.
mm	N/A	1/1	AO	