



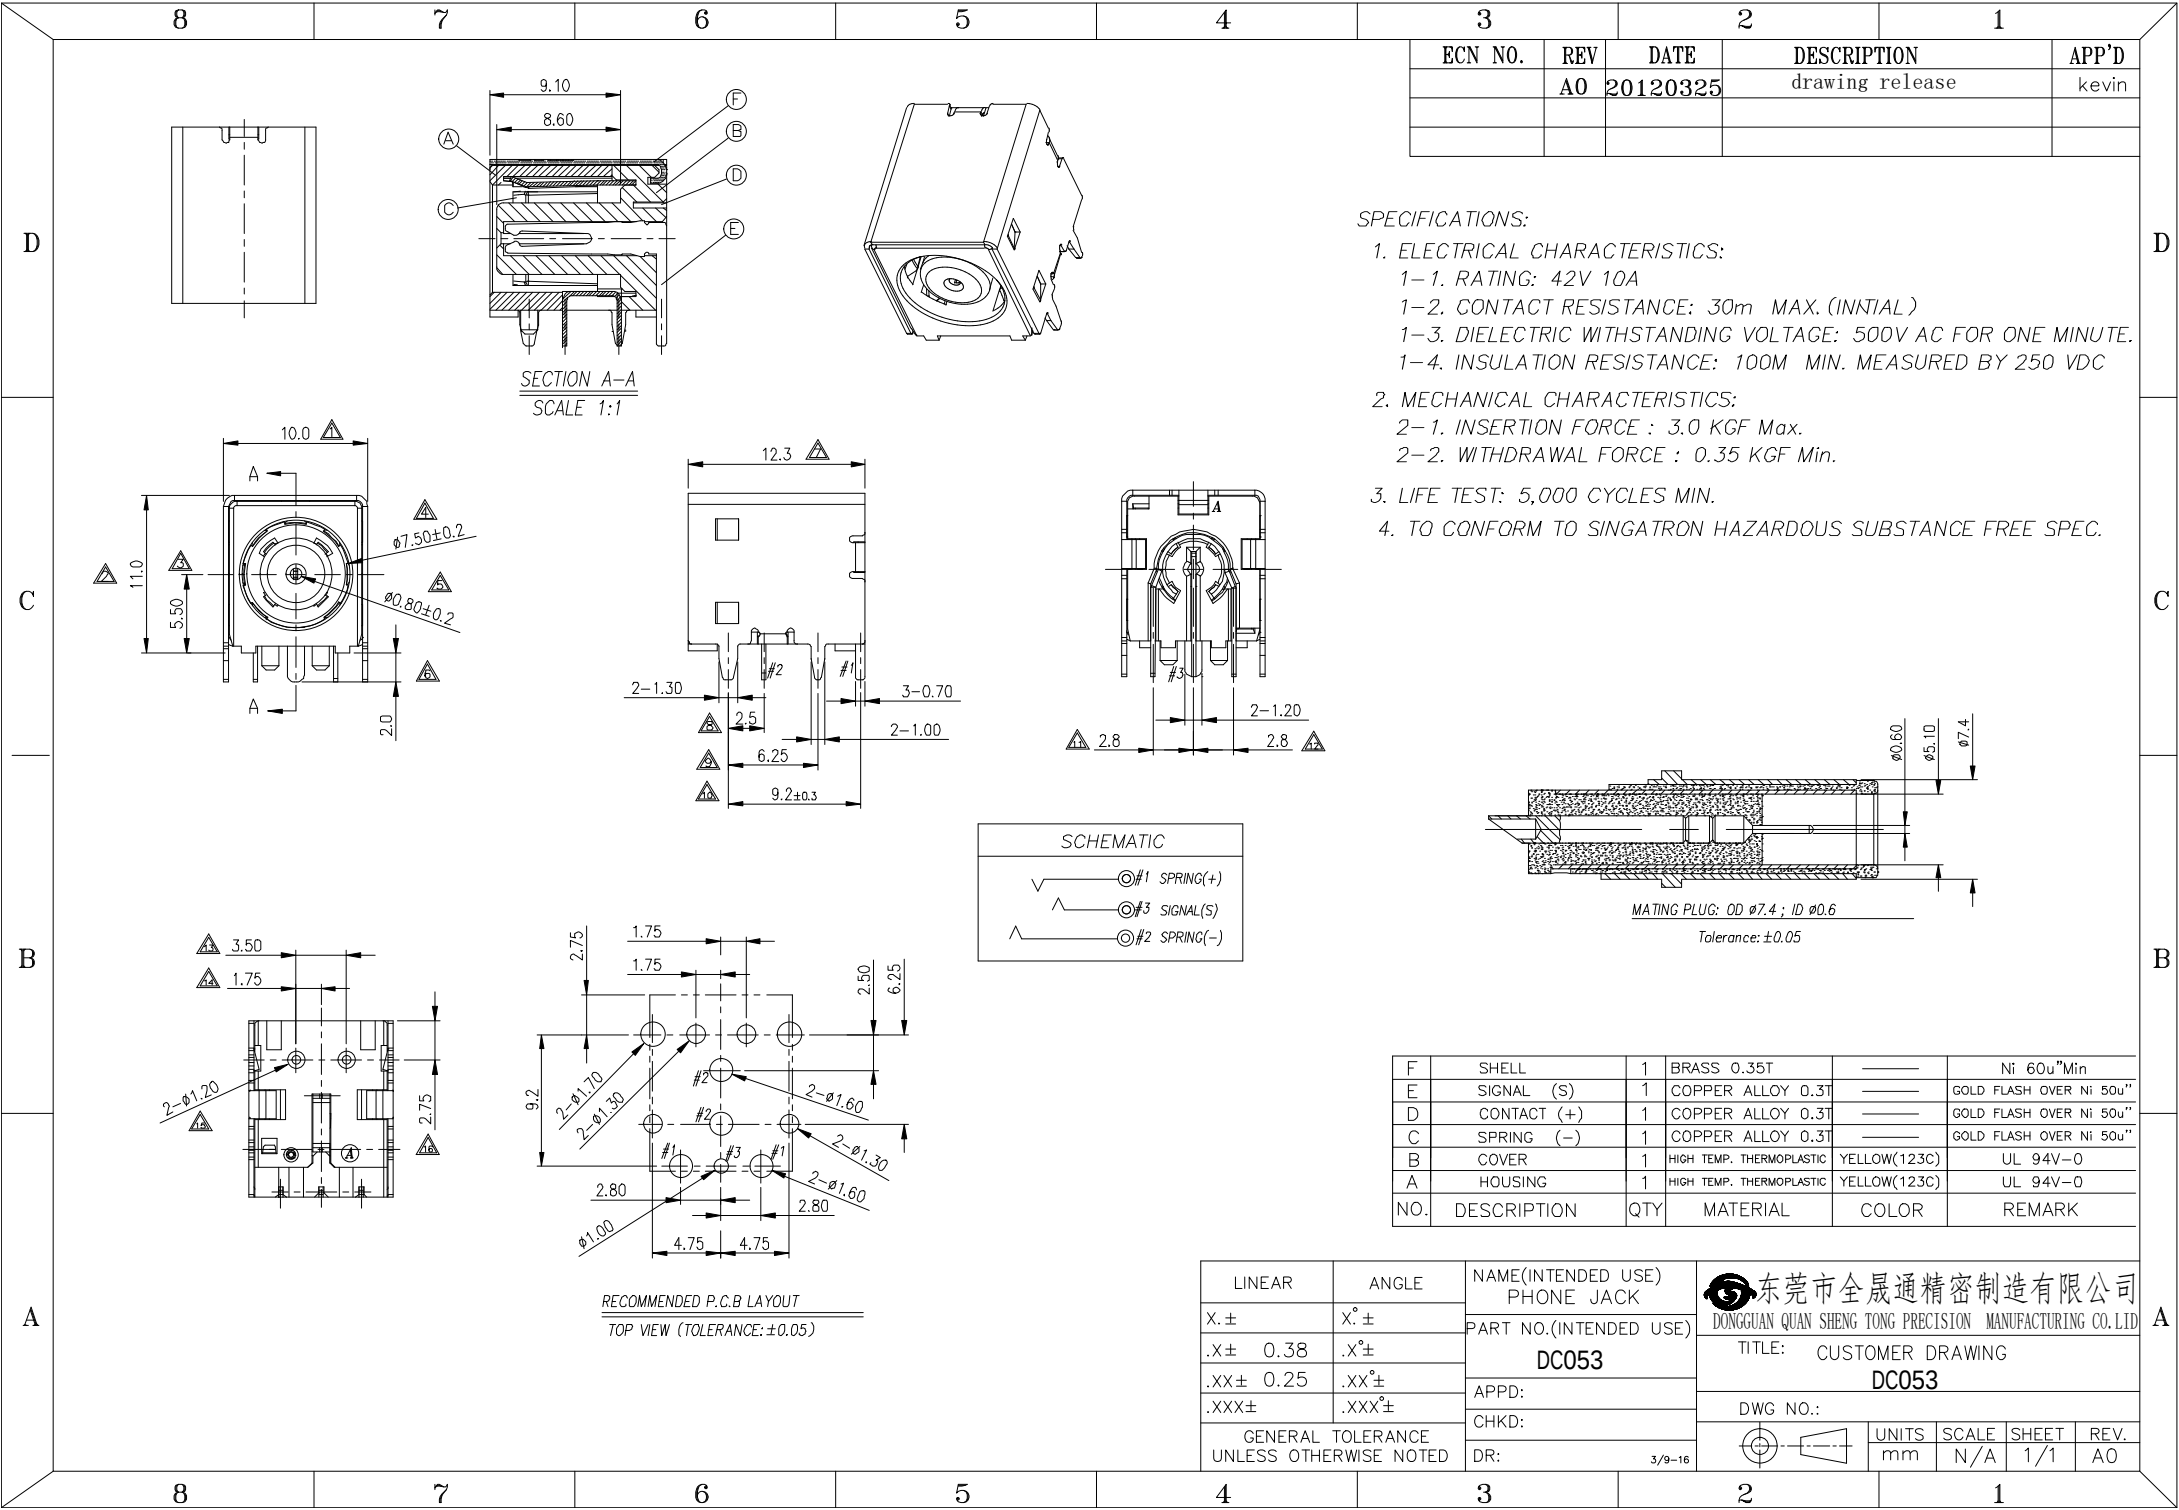

ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	20120325	drawing release	kevin

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 42V 10A
 - 1-2. CONTACT RESISTANCE: 30m MAX. (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100M MIN. MEASURED BY 250 VDC
 - MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 3.0 KGF Max.
 - 2-2. WITHDRAWAL FORCE : 0.35 KGF Min.
 - LIFE TEST: 5,000 CYCLES MIN.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.

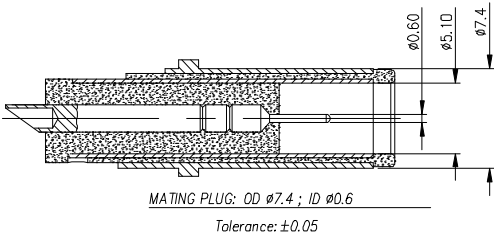

F	SHELL	1	BRASS 0.35T	—	Ni 60u"Min
E	SIGNAL (S)	1	COPPER ALLOY 0.3T	—	GOLD FLASH OVER Ni 50u"
D	CONTACT (+)	1	COPPER ALLOY 0.3T	—	GOLD FLASH OVER Ni 50u"
C	SPRING (-)	1	COPPER ALLOY 0.3T	—	GOLD FLASH OVER Ni 50u"
B	COVER	1	HIGH TEMP. THERMOPLASTIC	YELLOW(123C)	UL 94V-0
A	HOUSING	1	HIGH TEMP. THERMOPLASTIC	YELLOW(123C)	UL 94V-0
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

LINEAR	ANGLE	NAME(INTENDED USE) PHONE JACK	东莞市全晟通精密制造有限公司 DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO.LTD			
X.±	X°±	PART NO.(INTENDED USE) DC053				
.X± 0.38	.X°±	APPD:	TITLE: CUSTOMER DRAWING			
.XX± 0.25	.XX°±	CHKD:	DC053			
.XXX±	.XXX°±	DR:	DWG NO.:			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		3/9-16	UNITS SCALE SHEET REV.			
			mm N/A 1/1 A0			