
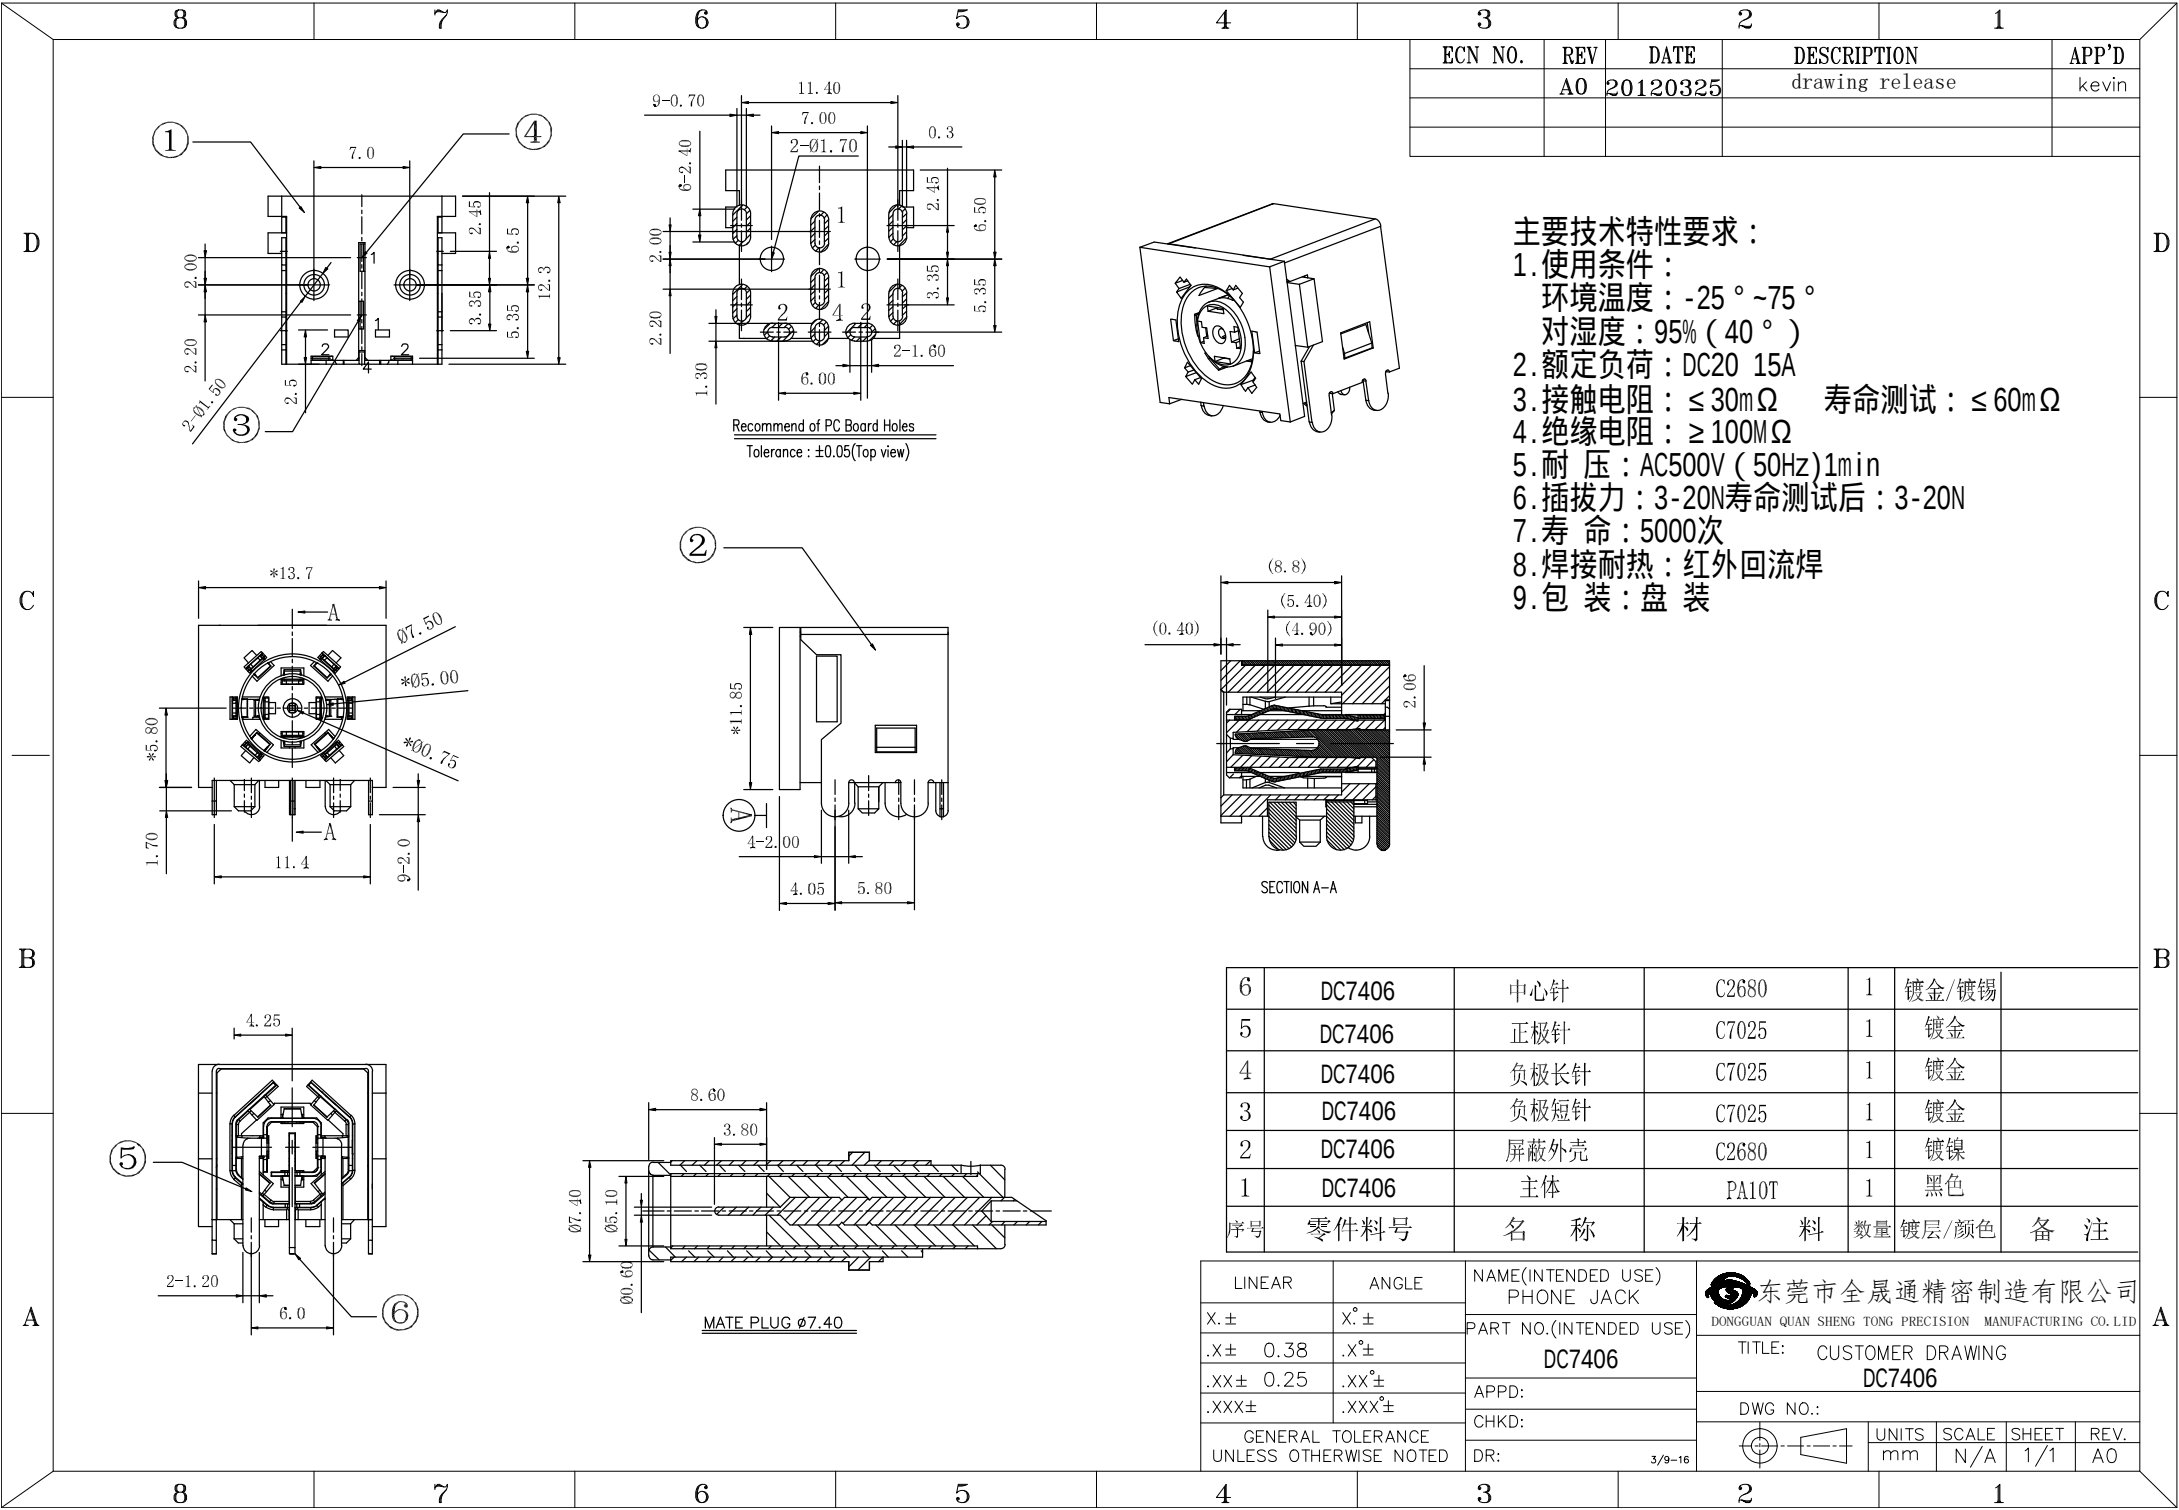




ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	20120325	drawing release	kevin

- 主要技术特性要求：
- 1.使用条件：
环境温度：-25 °~75 °
对湿度：95% (40 °)
 - 2.额定负荷：DC20 15A
 - 3.接触电阻：≤ 30mΩ 寿命测试：≤ 60mΩ
 - 4.绝缘电阻：≥ 100MΩ
 - 5.耐 压：AC500V (50Hz)1min
 - 6.插拔力：3-20N寿命测试后：3-20N
 - 7.寿 命：5000次
 - 8.焊接耐热：红外回流焊
 - 9.包 装：盘 装

6	DC7406	中心针	C2680	1	镀金/镀锡	
5	DC7406	正极针	C7025	1	镀金	
4	DC7406	负极长针	C7025	1	镀金	
3	DC7406	负极短针	C7025	1	镀金	
2	DC7406	屏蔽外壳	C2680	1	镀镍	
1	DC7406	主体	PA10T	1	黑色	
序号	零件料号	名 称	材 料	数量	镀层/颜色	备 注

LINEAR	ANGLE	NAME(INTENDED USE) PHONE JACK	 东莞市全晟通精密制造有限公司 DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO.,LTD			
X.±	X°±	PART NO.(INTENDED USE) DC7406				
.X± 0.38	.X°±	APPD:	TITLE: CUSTOMER DRAWING DC7406			
.XX± 0.25	.XX°±	CHKD:				
.XXX±	.XXX°±	DR:	DWG NO.:			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		3/9-16	 UNITS mm SCALE N/A SHEET 1/1 REV. A0			