



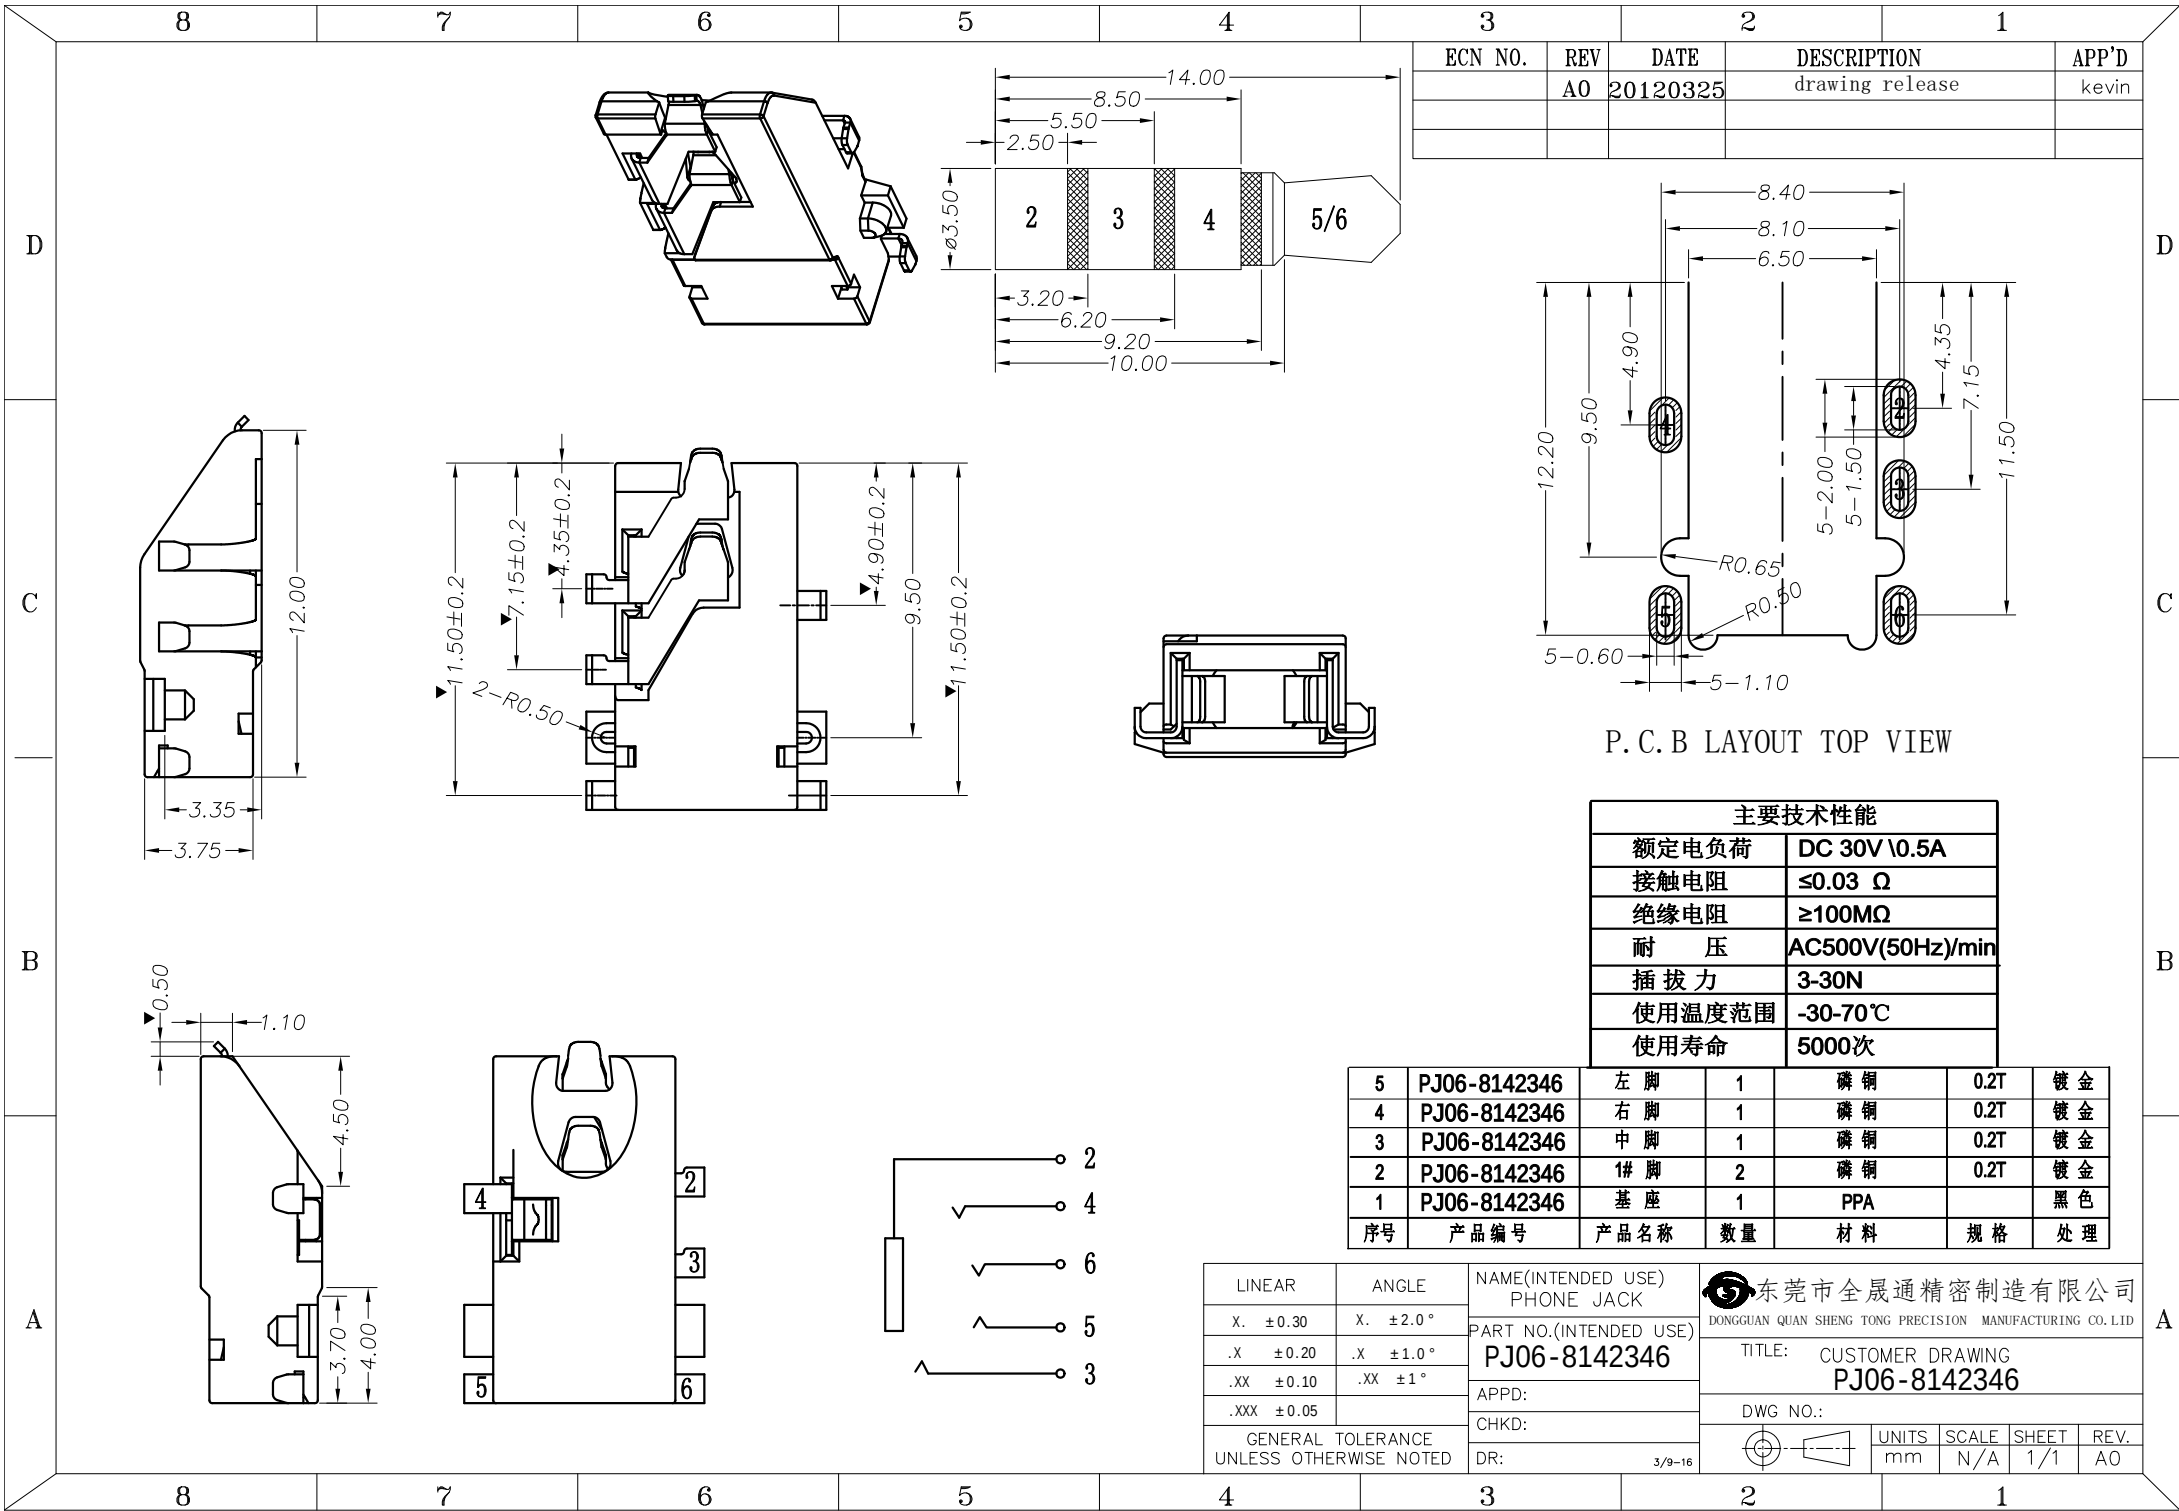

ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	20120325	drawing release	kevin

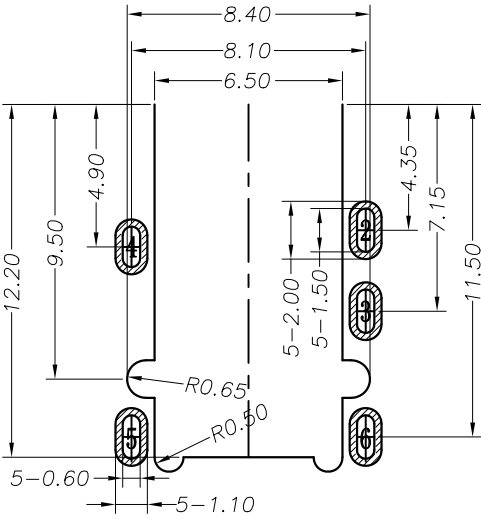

P.C.B LAYOUT TOP VIEW

主要技术性能	
额定电负荷	DC 30V\0.5A
接触电阻	≤0.03 Ω
绝缘电阻	≥100MΩ
耐 压	AC500V(50Hz)/min
插 拔 力	3-30N
使用温度范围	-30-70℃
使用寿命	5000次

5	PJ06-8142346	左 脚	1	磷 铜	0.2T	镀 金
4	PJ06-8142346	右 脚	1	磷 铜	0.2T	镀 金
3	PJ06-8142346	中 脚	1	磷 铜	0.2T	镀 金
2	PJ06-8142346	1# 脚	2	磷 铜	0.2T	镀 金
1	PJ06-8142346	基 座	1	PPA		黑 色
序号	产品编号	产品名称	数量	材 料	规 格	处 理

LINEAR		ANGLE		NAME(INTENDED USE) PHONE JACK		 东莞市全晟通精密制造有限公司			
X. ±0.30		X. ±2.0°		PART NO.(INTENDED USE) PJ06-8142346		DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO.LTD			
.X ±0.20		.X ±1.0°		APPD:		TITLE: CUSTOMER DRAWING PJ06-8142346			
.XX ±0.10		.XX ±1°				DWG NO.: 			
.XXX ±0.05				CHKD:					
GENERAL TOLERANCE UNLESS OTHERWISE NOTED				DR:		3/9-16			