


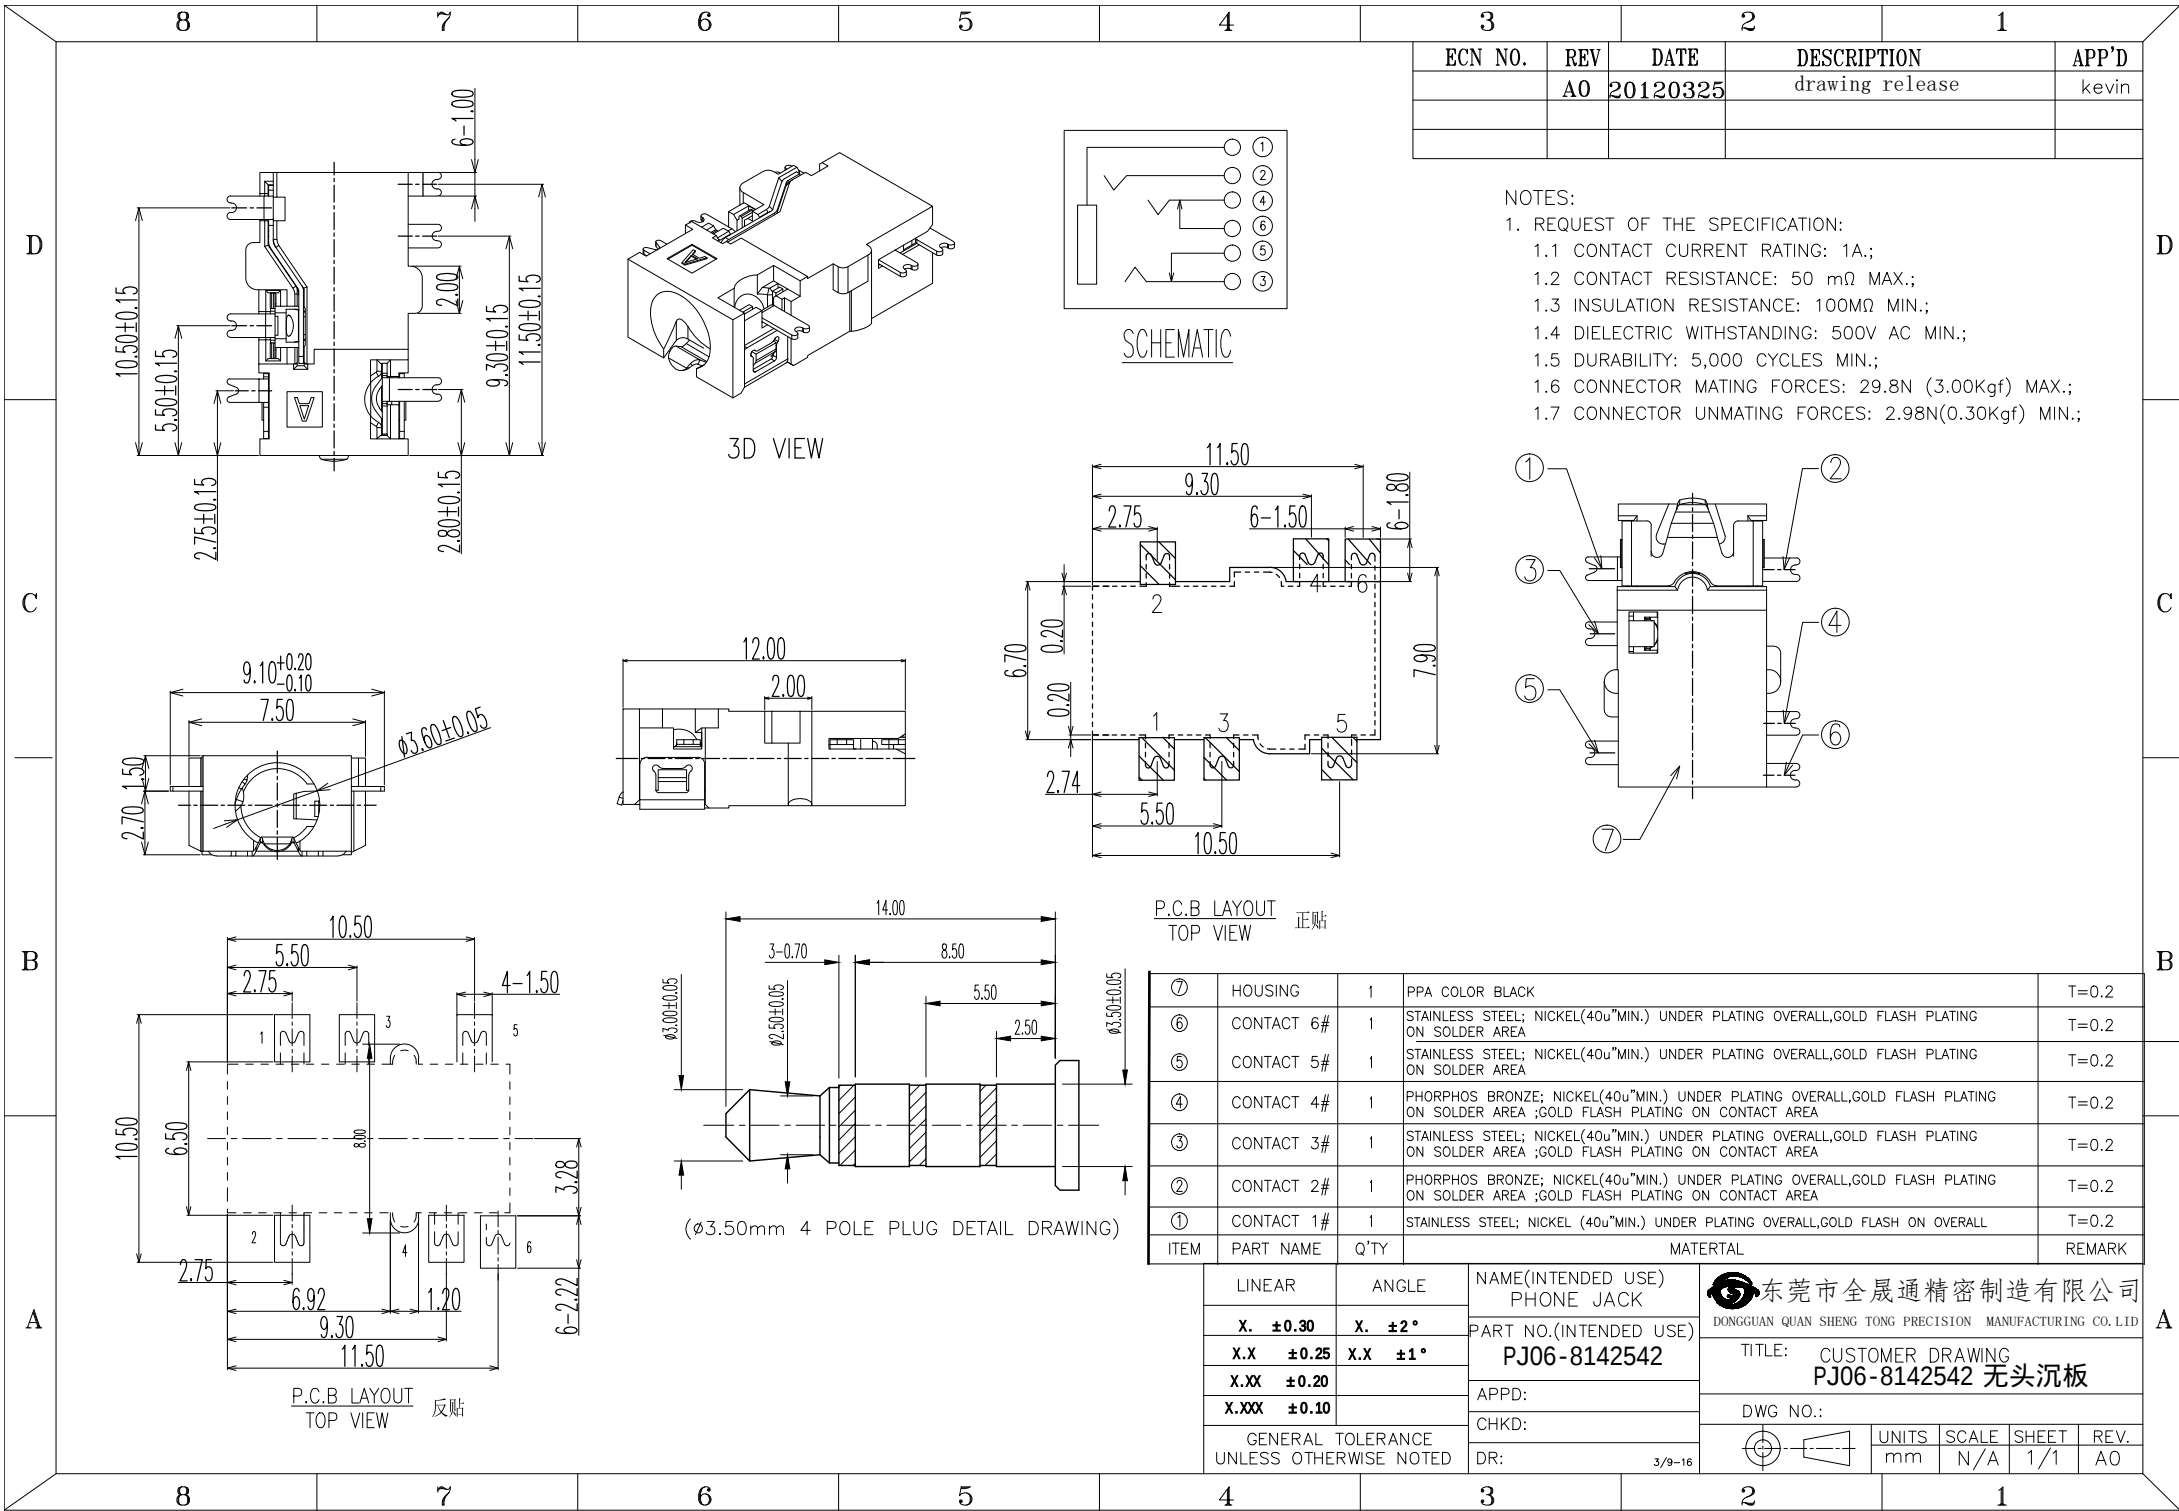

ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	20120325	drawing release	kevin

- NOTES:
- REQUEST OF THE SPECIFICATION:
 - CONTACT CURRENT RATING: 1A.;
 - CONTACT RESISTANCE: 50 mΩ MAX.;
 - INSULATION RESISTANCE: 100MΩ MIN.;
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 29.8N (3.00Kgf) MAX.;
 - CONNECTOR UNMATING FORCES: 2.98N(0.30Kgf) MIN.;

ITEM	PART NAME	Q'TY	MATERIAL	REMARK
⑦	HOUSING	1	PPA COLOR BLACK	T=0.2
⑥	CONTACT 6#	1	STAINLESS STEEL; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA	T=0.2
⑤	CONTACT 5#	1	STAINLESS STEEL; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA	T=0.2
④	CONTACT 4#	1	PHORPHOS BRONZE; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.2
③	CONTACT 3#	1	STAINLESS STEEL; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.2
②	CONTACT 2#	1	PHORPHOS BRONZE; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.2
①	CONTACT 1#	1	STAINLESS STEEL; NICKEL (40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH ON OVERALL	T=0.2

LINEAR	ANGLE	NAME(INTENDED USE) PHONE JACK	东莞市全晟通精密制造有限公司 DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO.LTD			
X. ±0.30	X. ±2°	PART NO.(INTENDED USE) PJ06-8142542				
X.X ±0.25	X.X ±1°	APPD:	TITLE: CUSTOMER DRAWING PJ06-8142542 无头沉板			
X.XX ±0.20		CHKD:	DWG NO.:			
X.XXX ±0.10		DR:	3/9-16			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED			UNITS mm SCALE N/A SHEET 1/1 REV. A0			